


HIGH PRESSURE SUBPLATE & MOUNTING BOLT KITS

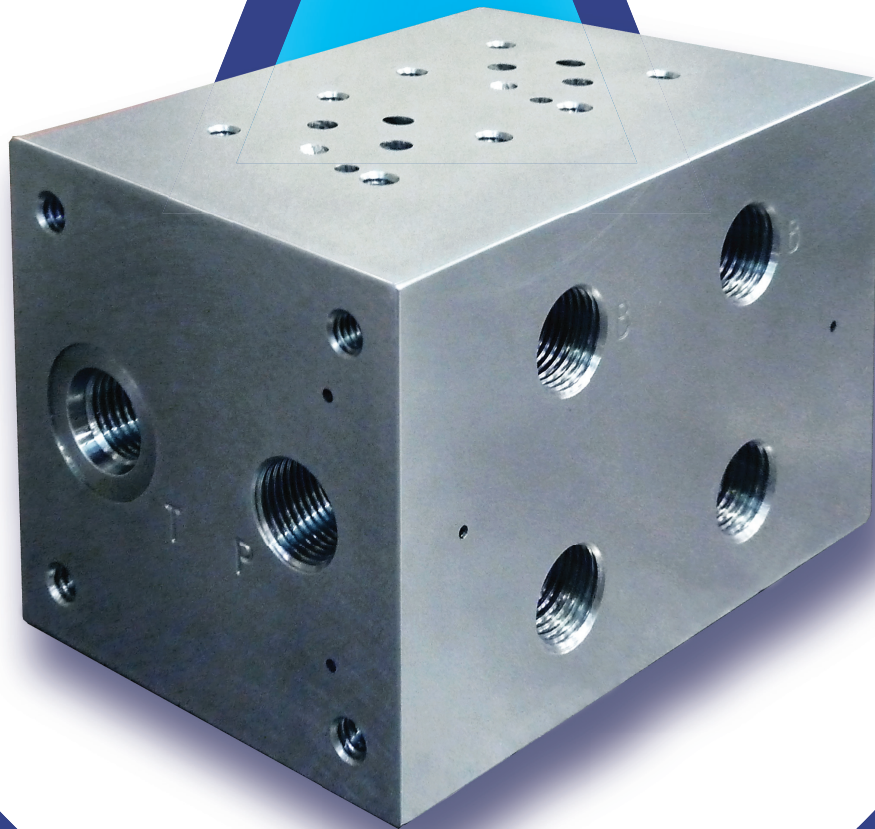

DYNEX
High Pressure Hydraulics

GENERAL INFORMATION

Valve mounting bolts are supplied when ordering subplates.
When ordering valves and subplates together, valves are not mounted on subplates.


Mounting bolts are not included when ordering valves alone.
The tables indicate the mounting kits that are available.

Also refer to *Directional Valve Features, Selection and Operating Recommendations*.

HP03 SUBPLATES

Part Number	Description
Subplates:	
PS029-HP03-SAE6	Side Ports, No. 6 SAE
PS029-HP03-BSP6	Side Ports, G 3/8 (BSPP)
PS030-.56MP ^①	Side Ports, 9/16 Medium Pressure, Coned and Threaded, .8125-16 UN Threaded
PS029-HP03-.38	Side Ports, 3/8 NPTF
Mounting Bolts:	
P11-BK	Four .250-20 UNC, Threaded x 0.75 inches (19,0 mm)

① Port uses Autoclave Medium Pressure, Butech M/P or equivalent fitting.

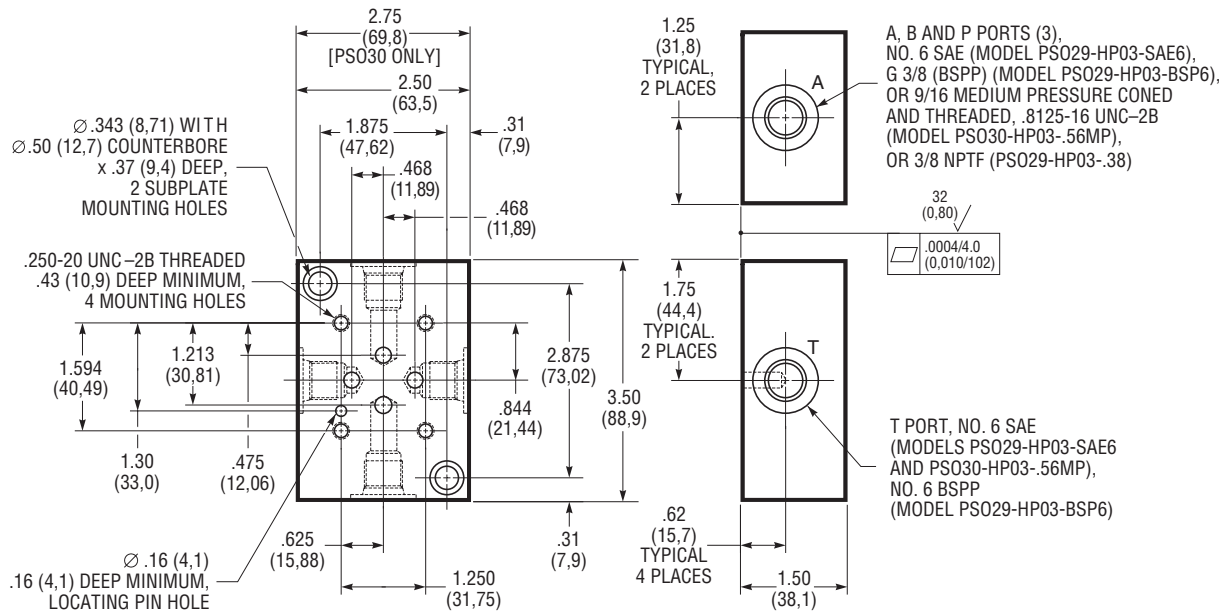


Subplate PS029-HP03-SAE6 or PS029-HP03-BSP6 or PS030-.56MP or PS029-HP03-.38

VST SUBPLATES^①

Part Number	Description
Subplates:	
PSO32-VST-SAE6	Side Ports, No. 6 SAE
PSO32-VST-BSP6	Side Ports, G 3/8 BSPP
PSO32-VST-.56MP ^②	Side Ports, 9/16 Medium Pressure, Coned and Threaded, .8125-16 UN Threaded
Mounting Bolts:	
P22-BK-32	Four .250-20 UNC, Threaded x 2.00 inches (50,8 mm)

① Special HP03 Pattern.

② Port uses Autoclave Medium Pressure, Butech M/P or equivalent fitting.

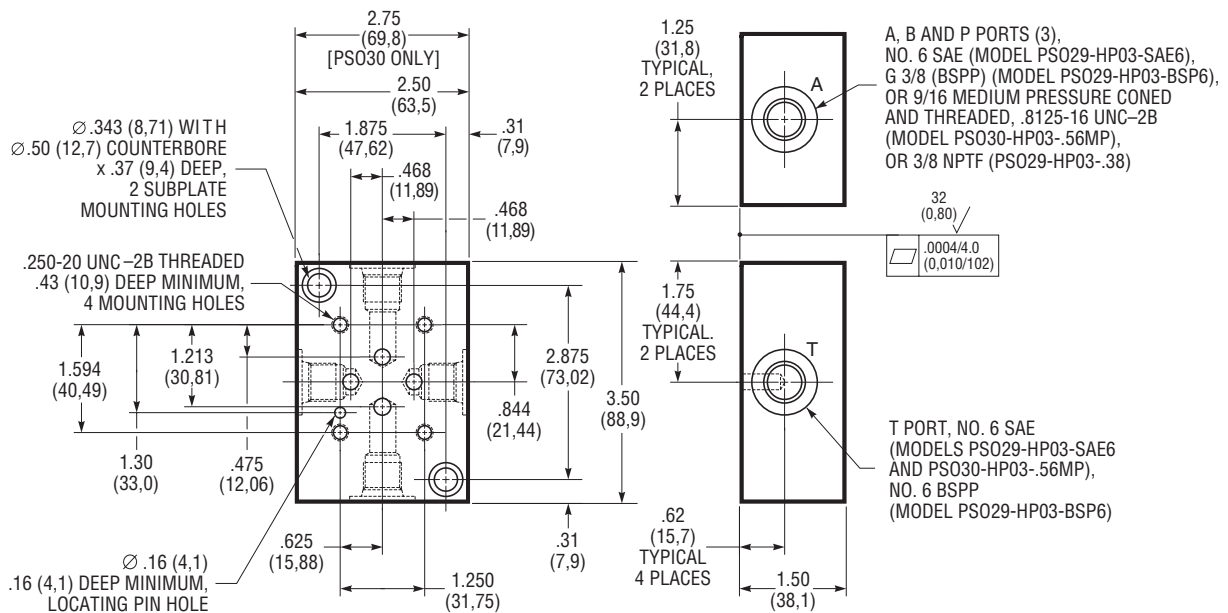


Subplate PSO32-VST-SAE6 or PSO32-VST-BSP6 or PSO32-VST-.56MP

HP03 DUAL STATION SUBPLATES

Part Number	Description
Subplates:	
MSO2-HP03-.56MP ^{①②}	Side Ports, 9/16
Mounting Bolts:	
P11-BK	Eight .250-20 UNC, Threaded x 0.75 inches (19,0 mm)

① Port uses Autoclave Medium Pressure, Butech M/P or equivalent fitting.

② Additional models are available with up to eight stations. Please contact the Dynex Sales department for details.

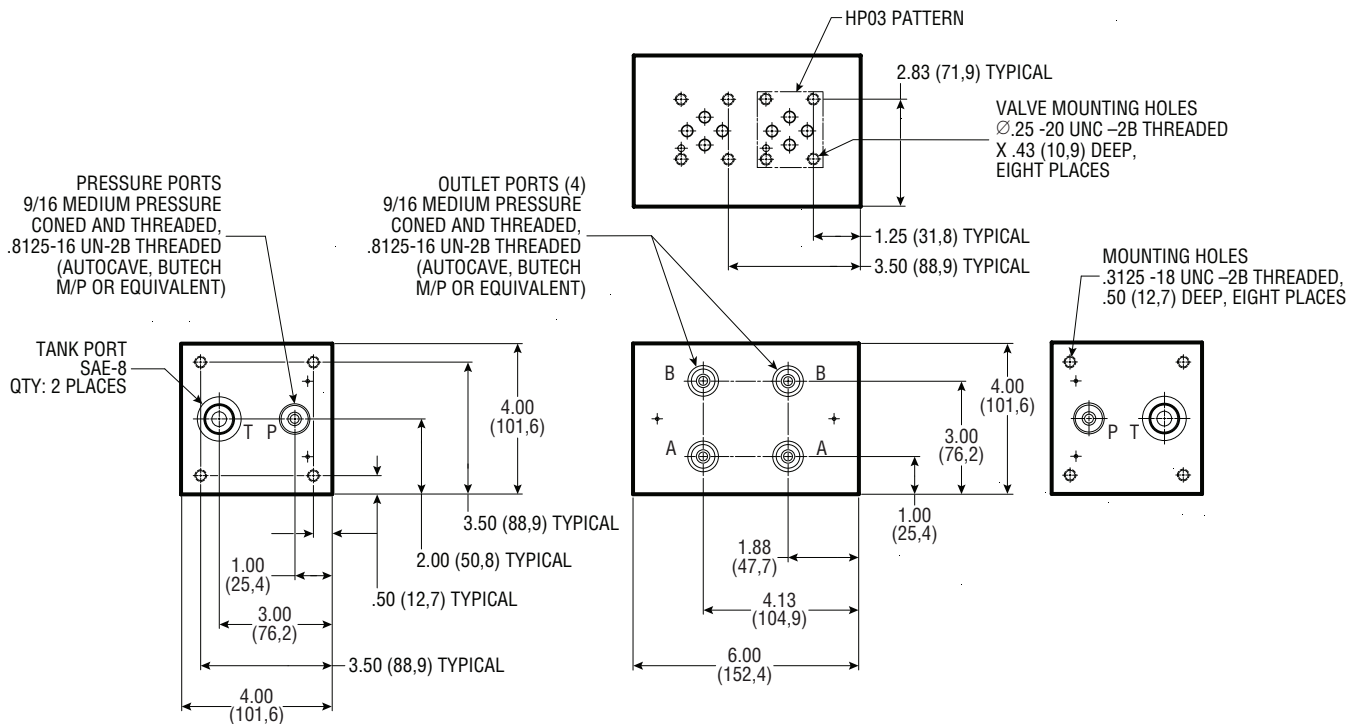


Subplate MSO2-HP03-.56MP

VH SUBPLATES

Part Number	Description
Subplate:	
PSO33-VHS-.75-14MP	Side Ports, 3/4-14 NPSM, Medium Pressure, Coned and Threaded ^①
PSO33-VHS-BSP-12	Side Ports, G 3/4 (BSPP) ^②
Mounting Bolt Kit:	
P33-BK	(4) .500-13 UNC, Threaded x 3.00 Inches (76,2 mm)

① "P" port uses Autoclave Medium Pressure, Butech M/P or equivalent fitting.

② Ports use British Standard Pipe Parallel fitting.

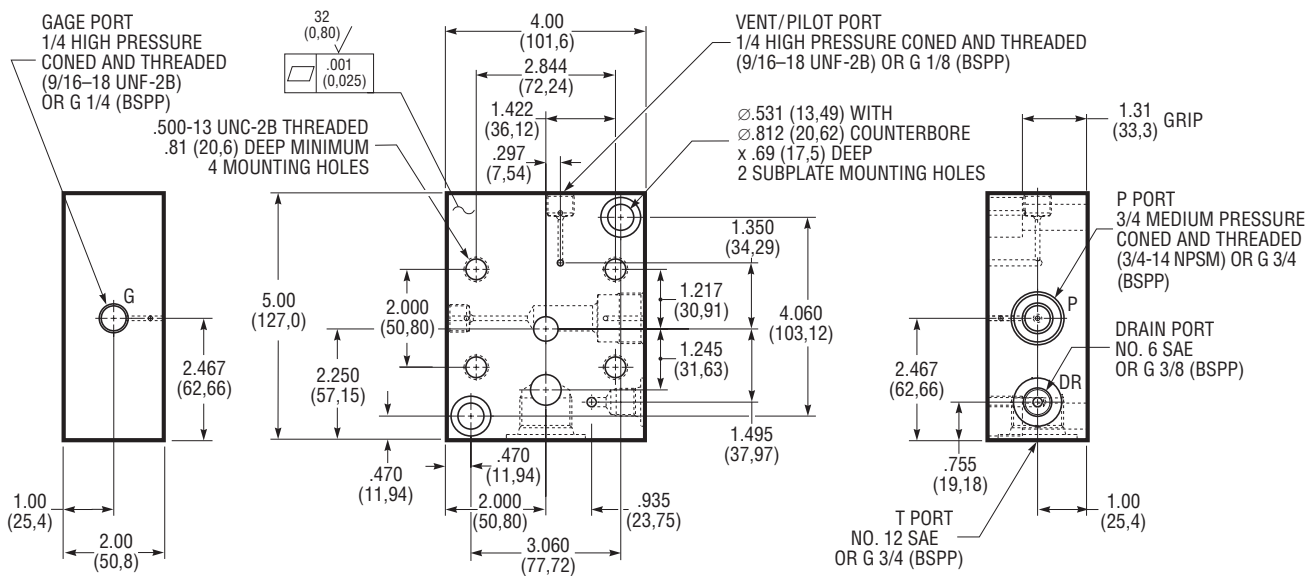

Subplate PSO33-VHS-.75-14MP or PSO33-VHS-BSP-12

Specifications shown were in effect when printed. Since errors or omissions are possible, contact your Sales representative or the Sales department for the most current specifications before ordering. Dynex reserves the right to discontinue products or change designs at any time without incurring any obligation.

www.dynexhydraulics.com

USA Headquarters

770 Capitol Drive
Pewaukee, WI 53072
Tel: +1 (262) 691-2222
FAX: +1 (262) 691-0312
sales@dynexhydraulics.com

Power Units & Systems

54 Nickerson Road
Ashland, MA 01721
Tel: +1 (508) 881-5110
ashland@dynexhydraulics.com

European Sales

Unit C5 Steel Close, Little End Road,
Eaton Socon, St Neots,
Cambs. PE19 8TT United Kingdom
Tel: +44 (0) 1480 213980 FAX: +44 (0) 1480 405662
sales@dynexhydraulics.co.uk